

# Introduction to OpenMP

---

## Lecture 5: Synchronisation

**EPSRC**

**NERC** SCIENCE OF THE ENVIRONMENT

 **archer**

**CRAY**  
THE SUPERCOMPUTER COMPANY

**epcc**



# Why is it required?

Recall:

- Need to synchronise actions on shared variables.
- Need to ensure correct ordering of reads and writes.
- Need to protect updates to shared variables (not atomic by default)



## BARRIER directive

- No thread can proceed past a barrier until all the other threads have arrived.
- Note that there is an implicit barrier at the end of DO/FOR, SECTIONS and SINGLE directives.

- Syntax:

Fortran: **!\$OMP BARRIER**

C/C++: **#pragma omp barrier**

- Either all threads or none must encounter the barrier: otherwise DEADLOCK!!



# BARRIER directive

## A simple example

- 3 threads
- Everyone multiplies

```
a[myid] = a[myid] * 3.5
```

- Everyone sets:

```
b[myid] = a[neighb] + c
```



## BARRIER directive

### A simple example


```
a[myid] = a[myid] * 3.5  
b[myid] = a[neighb] + c
```

```
!$OMP PARALLEL PRIVATE(I,MYID,NEIGHB)  
  myid = omp_get_thread_num()  
  neighb = myid - 1  
  if (myid.eq.0) neighb = omp_get_num_threads() - 1  
  ...  
  a(myid) = a(myid)*3.5  
  b(myid) = a(neighb) + c  
  ...  
!$OMP END PARALLEL
```



# BARRIER directive

## A simple example

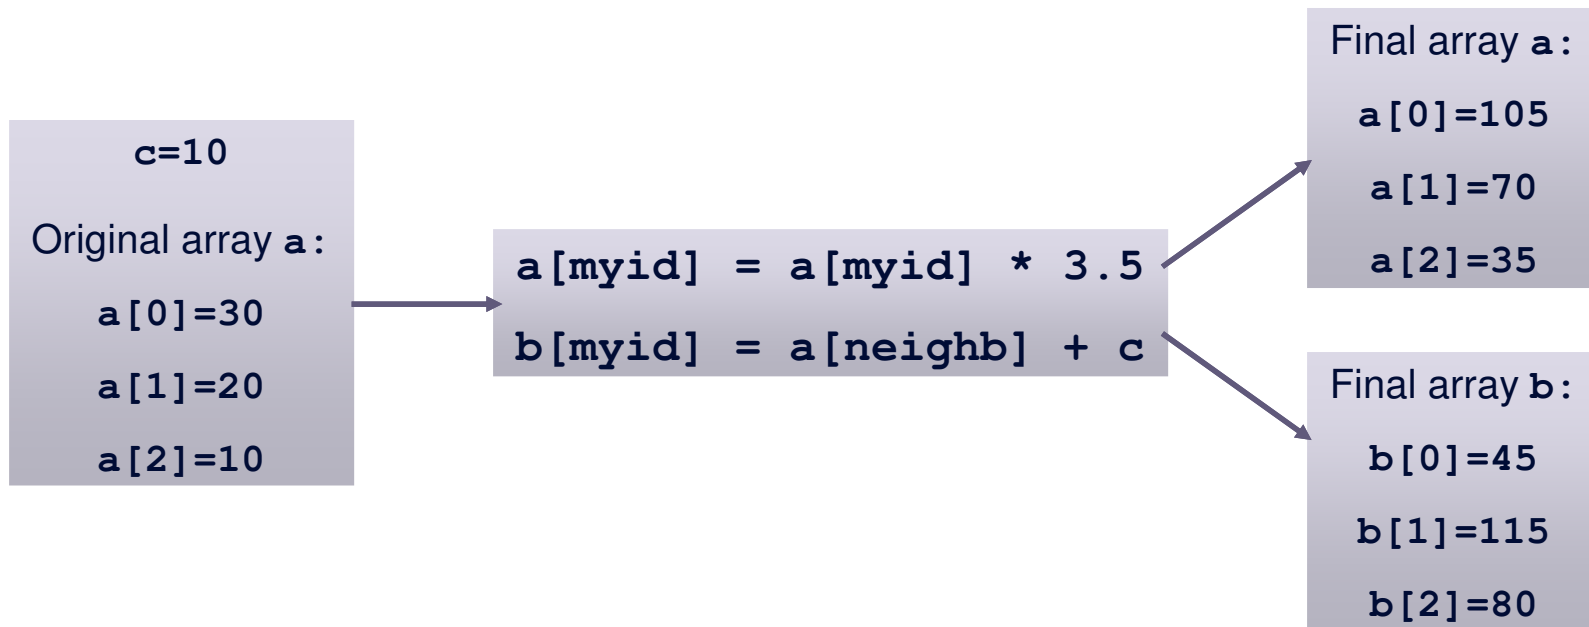

# BARRIER directive

# A simple example

```
a[myid] = a[myid] * 3.5
```

```
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid]</i>
<i>Thread 0</i>	✓	<i>myid=0</i>	<i>neighb=2</i>	<i>a[0]=30</i>	<i>105</i>	<i>a[0]=105</i>	<i>a[2]=35</i>
<i>Thread 1</i>	✓	<i>myid=1</i>	<i>neighb=0</i>	<i>a[1]=20</i>	<i>70</i>	<i>a[1]=70</i>	<i>a[0]=105</i>
<i>Thread 2</i>	✓	<i>myid=2</i>	<i>neighb=1</i>	<i>a[2]=10</i>	<i>35</i>	<i>a[2]=35</i>	<i>a[1]=20</i>

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get 1]</i>
<b>Thread 0</b>	✓	<b>myid=0</b>	<i>neighb=2</i>	<i>a[0]=30</i>	105	<i>a[0]=105</i>	<i>a[2]</i>
<b>Thread 1</b>	✓	<b>myid=1</b>	<i>neighb=0</i>	<i>a[1]=20</i>	70	<i>a[1]=70</i>	<i>a[0]</i>
<b>Thread 2</b>	✓	<b>myid=2</b>	<i>neighb=1</i>	<i>a[2]=10</i>	35	<i>a[2]=35</i>	<i>a[1]</i>





# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get 1]</i>
<b>Thread 0</b>	✓	<i>myid=0</i>	<i>neighb=2</i>	<i>a[0]=30</i>	105	<i>a[0]=105</i>	<i>a[2]</i>
<b>Thread 1 (stalling!)</b>	✓	<i>myid=1</i>	<i>neighb=0</i>	<i>a[1]=20</i>	70	<i>a[1]=70</i>	<i>a[0]</i>
<b>Thread 2</b>	✓	<i>myid=2</i>	<i>neighb=1</i>	<i>a[2]=10</i>	35	<i>a[2]=35</i>	<i>a[1]</i>



archer

epcc



# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid]</i>
<i>Thread 0</i>	✓	<i>myid=0</i>	<i>neighb=2</i>	<i>a[0]=30</i>	105	<i>a[0]=105</i>	<i>a[2]=35</i>
<i>Thread 1</i>	✓	<i>myid=1</i>	<i>neighb=0</i>	<i>a[1]=20</i>	70	<i>a[1]=70</i>	<i>a[0]=105</i>
<i>Thread 2</i>	✓	<i>myid=2</i>	<i>neighb=1</i>	<i>a[2]=10</i>	35	<i>a[2]=35</i>	<i>a[1]=20</i>



# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>
<b>Thread 0</b>	✓	<b>myid=0</b>	<b>neighb=2</b>	<b>a[0]=30</b>	<b>105</b>	<b>a[0]=105</b>	<b>a[2]=35</b>
<b>Thread 1</b> <i>(stalling!)</i>	✓	<b>myid=1</b>	<b>neighb=0</b>	<b>a[1]=20</b>	<b>70</b>	<b>a[1]=70</b>	<b>a[0]=105</b>
<b>Thread 2</b>	✓	<b>myid=2</b>	<b>neighb=1</b>	<b>a[2]=10</b>	<b>35</b>	<b>a[2]=35</b>	<b>a[1]=20</b>

Start of parallel region



archer

current



epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>Enter parallel region</i>	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>a[myid]</i>
<i>Thread 0</i>	✓	<i>myid=0</i>	<i>neighb=2</i>	<i>a[0]=30</i>	<i>105</i>	<i>a[0]=105</i>	<i>a[2]=35</i>	<i>45</i>
<i>Thread 1</i>	✓	<i>myid=1</i>	<i>neighb=0</i>	<i>a[1]=20</i>	<i>70</i>	<i>a[1]=70</i>	<i>a[0]=105</i>	<i>11</i>
<i>Thread 2</i>	✓	<i>myid=2</i>	<i>neighb=1</i>	<i>a[2]=10</i>	<i>35</i>	<i>a[2]=35</i>	<i>a[1]=20</i>	<i>30</i>

Start of parallel region



archer

current



epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

Parallel region	get myid	calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	get a[myid-1]	add 10	assign b[myid]
Thread 0	d=0	neighb=2	a[0]=30	105	a[0]=105	a[2]=35	45	b[0]=45
Thread 1	d=1	neighb=0	a[1]=20	70	a[1]=70	a[0]=105	115	b[1]=115
Thread 2	d=2	neighb=1	a[2]=10	35	a[2]=35	a[1]=20	30	b[2]=30

Start of parallel region



archer

current



epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
```

```
b[myid] = a[neighb] + c
```

<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b>	<b>neighb=2</b>	<b>a[0]=30</b>	<b>105</b>	<b>a[0]=105</b>	<b>a[2]=35</b>	<b>45</b>	<b>b[0]=45</b>
<b>Thread 1</b>	<b>neighb=0</b>	<b>a[1]=20</b>	<b>70</b>	<b>a[1]=70</b>	<b>a[0]=105</b>	<b>115</b>	<b>b[1]=115</b>
<b>Thread 2</b>	<b>neighb=1</b>	<b>a[2]=10</b>	<b>35</b>	<b>a[2]=35</b>	<b>a[1]=20</b>	<b>30</b>	<b>b[2]=30</b>

Start of parallel region



archer

epcc

current



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

<i>d</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b> <i>(waiting for thread 1)</i>	<i>=2</i>	<i>a[0]=30</i>	<i>105</i>	<i>a[0]=105</i>	<i>a[2]=35</i>	<i>45</i>	<i>b[0]=45</i>
<b>Thread 1</b>	<i>=0</i>	<i>a[1]=20</i>	<i>70</i>	<i>a[1]=70</i>	<i>a[0]=105</i>	<i>115</i>	<i>b[1]=115</i>
<b>Thread 2</b> <i>(waiting for thread 1)</i>	<i>=1</i>	<i>a[2]=10</i>	<i>35</i>	<i>a[2]=35</i>	<i>a[1]=20</i>	<i>30</i>	<i>b[2]=30</i>

Start of parallel region



archer

epcc

current



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	get a[myid- 1]	add 10	assign to b[myid]
Thread 0	a[0]=30	105	a[0]=105	a[2]=35	45	b[0]=45
Thread 1	a[1]=20	70	a[1]=70	a[0]=105	115	b[1]=115
Thread 2	a[2]=10	35	a[2]=35	a[1]=20	30	b[2]=30

Start of  
parallel  
region






# A simple example

```

a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
    
```

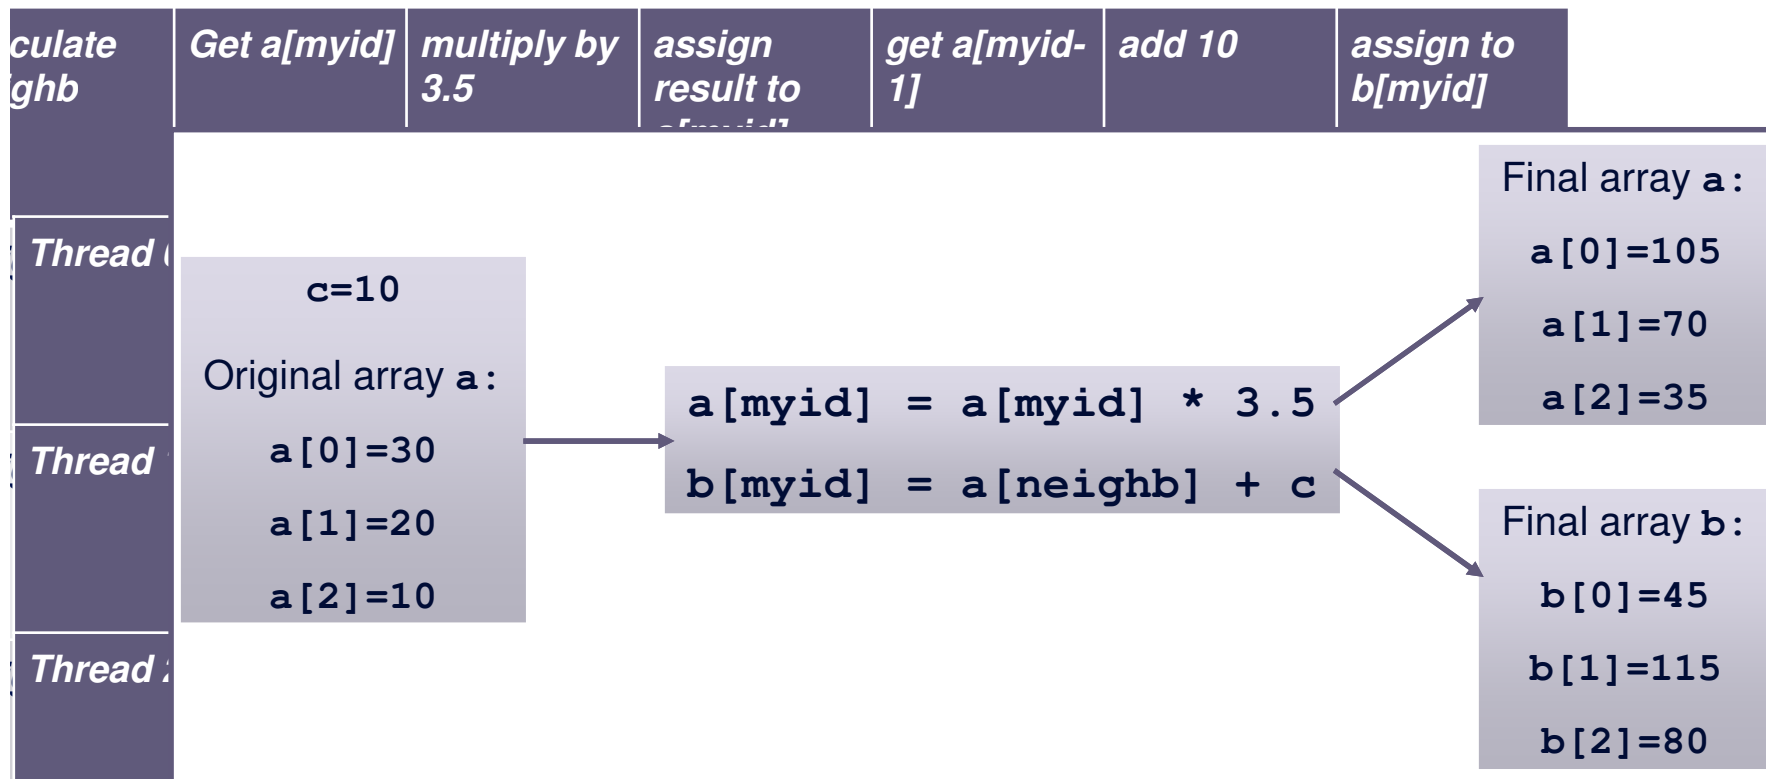

Start of parallel region



archer

epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<i>Thread 0</i>	<b>a[0]=105</b>	a[2]=35	45	<b>b[0]=45</b>
<i>Thread 1</i>	<b>a[1]=70</b>	a[0]=105	115	<b>b[1]=115</b>
<i>Thread 2</i>	<b>a[2]=35</b>	a[1]=20	30	<b>b[2]=30</b>

Final array a :

a[0]=105  
a[1]=70  
a[2]=35

Final array b :

b[0]=45  
b[1]=115  
b[2]=80 30

Start of parallel region



# A simple example

```
a[myid] = a[myid] * 3.5
```

```
b[myid] = a[neighb] + c
```

	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b>	2	<b>a[0]=30</b>	105	<b>a[0]=105</b>	<b>a[2]=35</b>	45	<b>b[0]=45</b>
<b>Thread 1</b>	0	<b>a[1]=20</b>	70	<b>a[1]=70</b>	<b>a[0]=105</b>	115	<b>b[1]=115</b>
<b>Thread 2</b>	1	<b>a[2]=10</b>	35	<b>a[2]=35</b>	<b>a[1]=20</b>	30	<b>b[2]=30</b>

Start of parallel region



archer

current

epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b>		<b>neighb=2</b>	<b>a[0]=30</b>	<b>105</b>	<b>a[0]=105</b>	<i>a[2]=35</i>	<i>45</i>	<i>b[0]=45</i>
<b>Thread 1</b>		<b>neighb=0</b>	<b>a[1]=20</b>	<i>70</i>	<b>a[1]=70</b>	<b>a[0]=105</b>	<i>115</i>	<i>b[1]=115</i>
<b>Thread 2</b>		<b>neighb=1</b>	<b>a[2]=10</b>	<b>35</b>	<b>a[2]=35</b>	<i>a[1]=20</i>	<i>30</i>	<i>b[2]=30</i>

Start of parallel region



archer

current



epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>		<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b>		<i>neighb=2</i>	<i>a[0]=30</i>	<i>105</i>	<i>a[0]=105</i>	<b>Barrier</b>	<i>a[2]=35</i>	<i>45</i>	<i>b[0]=45</i>
<b>Thread 1</b>		<i>neighb=0</i>	<i>a[1]=20</i>	<i>70</i>	<i>a[1]=70</i>		<i>a[0]=105</i>	<i>115</i>	<i>b[1]=115</i>
<b>Thread 2</b>		<i>neighb=1</i>	<i>a[2]=10</i>	<i>35</i>	<i>a[2]=35</i>		<i>a[1]=20</i>	<i>30</i>	<i>b[2]=30</i>

Start of parallel region



archer

current



epcc



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	get myid	calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	Barrier	get a[myid-1]	add 10	assign to b[myid]
<b>Thread 0</b> <i>(waiting for thread 1)</i>		<b>neighb=2</b>	<b>a[0]=30</b>	<b>105</b>	<b>a[0]=105</b>	Barrier	<b>a[2]=35</b>	<b>45</b>	<b>b[0]=45</b>
<b>Thread 1</b>		<b>neighb=0</b>	<b>a[1]=20</b>	<b>70</b>	<b>a[1]=70</b>		<b>a[0]=105</b>	<b>115</b>	<b>b[1]=115</b>
<b>Thread 2</b> <i>(waiting for thread 1)</i>		<b>neighb=1</b>	<b>a[2]=10</b>	<b>35</b>	<b>a[2]=35</b>		<b>a[1]=20</b>	<b>30</b>	<b>b[2]=30</b>

Start of parallel region



archer

current



epcc



# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	get myid	calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	Barrier	get a[myid-1]	add 10	assign to b[myid]
<b>Thread 0</b> <i>(waiting for thread 1)</i>		<b>neighb=2</b>	<b>a[0]=30</b>	<b>105</b>	<b>a[0]=105</b>	Barrier	<b>a[2]=35</b>	<b>45</b>	<b>b[0]=45</b>
<b>Thread 1</b>		<b>neighb=0</b>	<b>a[1]=20</b>	<b>70</b>	<b>a[1]=70</b>		<b>a[0]=105</b>	<b>115</b>	<b>b[1]=115</b>
<b>Thread 2</b> <i>(waiting for thread 1)</i>		<b>neighb=1</b>	<b>a[2]=10</b>	<b>35</b>	<b>a[2]=35</b>		<b>a[1]=20</b>	<b>30</b>	<b>b[2]=30</b>

Start of parallel region



archer

current



End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

	<i>get myid</i>	<i>calculate neighb</i>	<i>Get a[myid]</i>	<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	Barrier	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<b>Thread 0</b>		<i>neighb=2</i>	<i>a[0]=30</i>	<i>105</i>	<i>a[0]=105</i>		<i>a[2]=35</i>	<i>45</i>	<i>b[0]=45</i>
<b>Thread 1</b>		<i>neighb=0</i>	<i>a[1]=20</i>	<i>70</i>	<i>a[1]=70</i>		<i>a[0]=105</i>	<i>115</i>	<i>b[1]=115</i>
<b>Thread 2</b>		<i>neighb=1</i>	<i>a[2]=10</i>	<i>35</i>	<i>a[2]=35</i>		<i>a[1]=70</i>	<i>30</i>	<i>b[2]=30</i>

Start of parallel region



archer

epcc



End of parallel region



# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

myid	calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	Barrier	get a[myid-1]	add 10	assign to b[myid]
Thread 0	neighb=2	a[0]=30	105	a[0]=105	Barrier	a[2]=35	45	b[0]=45
Thread 1	neighb=0	a[1]=20	70	a[1]=70		a[0]=105	115	b[1]=115
Thread 2	neighb=1	a[2]=10	35	a[2]=35		a[1]=70	80	b[2]=30

Start of parallel region



current

End of parallel region

# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

Calculate neighb	Get a[myid]	multiply by 3.5	assign result to a[myid]	Barrier	get a[myid- 1]	add 10	assign to b[myid]
Thread 0	a[0]=30	105	a[0]=105	Barrier	a[2]=35	45	b[0]=45
Thread 1	a[1]=20	70	a[1]=70		a[0]=105	115	b[1]=115
Thread 2	a[2]=10	35	a[2]=35		a[1]=70	80	b[2]=80

Start of  
parallel  
region



# A simple example

```
a[myid] = a[myid] * 3.5
b[myid] = a[neighb] + c
```

<i>multiply by 3.5</i>	<i>assign result to a[myid]</i>	<i>get a[myid-1]</i>	<i>add 10</i>	<i>assign to b[myid]</i>
<i>Thread 0</i>	<i>a[0]=105</i>	<i>a[2]=35</i>	<i>45</i>	<i>b[0]=45</i>
<i>Thread 1</i>	<i>a[1]=70</i>	<i>a[0]=105</i>	<i>115</i>	<i>b[1]=115</i>
<i>Thread 2</i>	<i>a[2]=35</i>	<i>a[1]=70</i>	<i>80</i>	<i>b[2]=80</i>



Final array a :  
a [0]=105  
a [1]=70  
a [2]=35

Final array b :  
b [0]=45  
b [1]=115  
b [2]=80

Correct!

Start of parallel region





## A simple example

```
a[myid] = a[myid] * 3.5  
b[myid] = a[neighb] + c
```

```
!$OMP PARALLEL PRIVATE (I,MYID,NEIGHB)  
  myid = omp_get_thread_num()  
  neighb = myid - 1  
  if (myid.eq.0) neighb = omp_get_num_threads() - 1  
  ...  
  a(myid) = a(myid)*3.5  
  
!$OMP BARRIER  
  b(myid) = a(neighb) + c  
  
  ...  
  
!$OMP END PARALLEL
```

Barrier required to force synchronisation on a



# Critical sections

- A critical section is a block of code which can be executed by only one thread at a time.
- Can be used to protect updates to shared variables.
- The CRITICAL directive allows critical sections to be named.
- If one thread is in a critical section with a given name, no other thread may be in a critical section with the same name (though they can be in critical sections with other names).



# CRITICAL directive

- Syntax:

Fortran: `!$OMP CRITICAL [( name )]`

*block*

`!$OMP END CRITICAL [( name )]`

C/C++: `#pragma omp critical [( name )]`

*structured block*

- In Fortran, the names on the directive pair must match.
- If the name is omitted, a null name is assumed (all unnamed critical sections effectively have the same null name).



## CRITICAL directive (cont)

Example: pushing and popping a task stack

```
!$OMP PARALLEL SHARED (STACK) , PRIVATE (INEXT, INEW)  
    ...  
!$OMP CRITICAL (STACKPROT)  
    inext = getnext(stack)  
!$OMP END CRITICAL (STACKPROT)  
    call work(inext, inew)  
!$OMP CRITICAL (STACKPROT)  
    if (inew .gt. 0) call putnew(inew, stack)  
!$OMP END CRITICAL (STACKPROT)  
    ...  
!$OMP END PARALLEL
```





## Lock routines

- Occasionally we may require more flexibility than is provided by CRITICAL directive.
- A lock is a special variable that may be *set* by a thread. No other thread may *set* the lock until the thread which set the lock has *unset* it.
- Setting a lock can either be blocking or non-blocking.
- A lock must be initialised before it is used, and may be destroyed when it is no longer required.
- Lock variables should not be used for any other purpose.



# Lock routines - syntax

Fortran:

```
USE OMP_LIB
```

```
SUBROUTINE OMP_INIT_LOCK(OMP_LOCK_KIND var)
```

```
SUBROUTINE OMP_SET_LOCK(OMP_LOCK_KIND var)
```

```
LOGICAL FUNCTION OMP_TEST_LOCK(OMP_LOCK_KIND var)
```

```
SUBROUTINE OMP_UNSET_LOCK(OMP_LOCK_KIND var)
```

```
SUBROUTINE OMP_DESTROY_LOCK(OMP_LOCK_KIND var)
```

*var* should be an INTEGER of the same size as addresses (e.g. INTEGER\*8 on a 64-bit machine)

OMP\_LIB defines OMP\_LOCK\_KIND



## Lock routines - syntax

C/C++:

```
#include <omp.h>
```

```
void omp_init_lock(omp_lock_t *lock);
```

```
void omp_set_lock(omp_lock_t *lock);
```

```
int omp_test_lock(omp_lock_t *lock);
```

```
void omp_unset_lock(omp_lock_t *lock);
```

```
void omp_destroy_lock(omp_lock_t *lock);
```

There are also nestable lock routines which allow the same thread to set a lock multiple times before unsetting it the same number of times.




# Lock example

Example (compute degree of each vertex in a graph):

```
for (i=0; i<nvertexes; i++){  
    omp_init_lock(lockvar[i]);  
}
```

```
#pragma omp parallel for  
    for (j=0; j<nedges; j++){  
        omp_set_lock(lockvar[edge[j].vertex1]);  
        degree[edge[j].vertex1]++;  
        omp_unset_lock(lockvar[edge[j].vertex1]);  
        omp_set_lock(lockvar[edge[j].vertex2]);  
        degree[edge[j].vertex2]++;  
        omp_unset_lock(lockvar[edge[j].vertex2]);  
    }
```

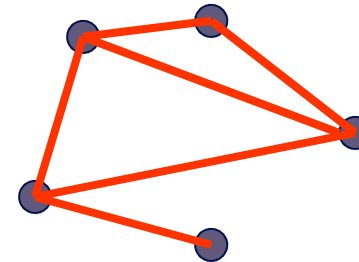

## Atomic directive

- Used to protect an update to a single shared variable.
- Applies only to a single statement.



## Atomic directive

- Used to protect an update to a single shared variable
- Applies only to a single statement
- May be more efficient than using CRITICAL directives
  - i.e. you can protect different array elements separately
- No interaction with CRITICAL directives
- May be particularly efficient if directly supported by the hardware



# Atomic directive - Fortran syntax

**!\$OMP ATOMIC**  
**statement**

where *statement* must have one of these forms:

$x = x \text{ } \mathit{op} \text{ } \mathit{expr}$

$x = \mathit{expr} \text{ } \mathit{op} \text{ } x$

$x = \mathit{intr}(x, \mathit{expr})$  or

$x = \mathit{intr}(\mathit{expr}, x)$

*op* is one of +, \*, -, /, .and., .or., .eqv., or .neqv.

*intr* is one of MAX, MIN, IAND, IOR or IEOB



# Atomic directive - C syntax

```
#pragma omp atomic  
statement
```

where *statement* must have one of these forms:

$x \text{ *binop* = expr}$

or

$x++$

$++x$

$x--$

$--x$

*binop* is one of +, \*, -, /, &, ^, <<, or >>

- Note that the evaluation of *expr* is not atomic!






# Atomic directive - example

Example (compute degree of each vertex in a graph):

```
for (i=0; i<nvertexes; i++){
    omp_init_lock(lockvar[i]);
}

#pragma omp parallel for
    for (j=0; j<nedges; j++){
        omp_set_lock(lockvar[edge[j].vertex1]);
        degree[edge[j].vertex1]++;
        omp_unset_lock(lockvar[edge[j].vertex1]);
        omp_set_lock(lockvar[edge[j].vertex2]);
        degree[edge[j].vertex2]++;
        omp_unset_lock(lockvar[edge[j].vertex2]);
    }
```

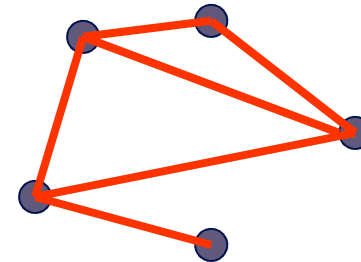

# Atomic directive - example


Example (compute degree of each vertex in a graph):

```
#pragma omp parallel for
  for (j=0; j<nedges; j++){

    omp_set_lock(lockvar[edge[j].vertex1]);
    degree[edge[j].vertex1]++;

    omp_unset_lock(lockvar[edge[j].vertex1]);
    omp_set_lock(lockvar[edge[j].vertex2]);
    degree[edge[j].vertex2]++;
    omp_unset_lock(lockvar[edge[j].vertex2]);

  }
```

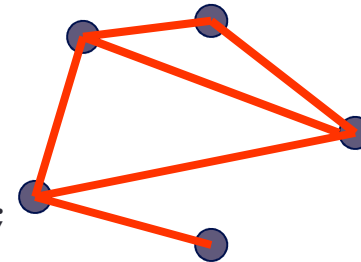


# Atomic directive - example

Example (compute degree of each vertex in a graph):

```
#pragma omp parallel for
  for (j=0; j<nedges; j++){
    #pragma omp atomic
      degree[edge[j].vertex1]++;

    #pragma omp atomic
      degree[edge[j].vertex2]++;
  }
```

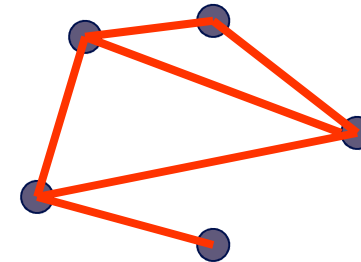

## Exercise

### Molecular dynamics

- The code supplied is a simple molecular dynamics simulation of the melting of solid argon.
- Computation is dominated by the calculation of force pairs in subroutine **forces**.
- Parallelise this routine using a DO/FOR directive and critical sections.
  - Watch out for PRIVATE and REDUCTION variables.
  - Choose a suitable loop schedule
- Extra exercise: can you improve the performance by using locks, or by using a reduction array (C programmers will need to implement this “by hand”).

